



THERM-A-SOL

Product Data Sheet


Introduction

Therm-A-Sol is an intumescent material based on hydrated sodium silicate - mixed with an organic binder. When it is subjected to temperatures in excess of 100°C (212 F) Therm-A-Sol will intumesce and increase in volume.

Description

Therm-A-sol is available in sheet form and has a self-adhesive tape for ease of application.

Therm-A-Sol is nominally 2mm in thickness

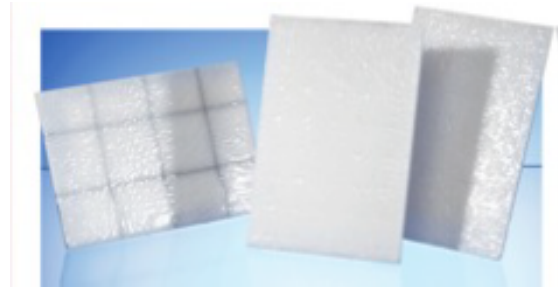

Application

When Therm-A-Sol is subjected to a fully developed fire the intumescent material produces a mass of incombustible heat resistant foam that is like glass.

Therm-A-Sol has been specially developed for sealing applications but it is particularly suited for the following type of installation:

- used as a concealed fire seal behind timber lippings.
- sealing gaps between fire resisting doors and frames.

For ease of installation it has a self – adhesive tape allowing rapid installation for any application.

Availability

Therm-A-Sol is available in full size sheets :- 2100mm x 1100mm x 2mm

Contacting Us

Intumescent Seals
Brewery Road,
Pampisford,
Cambridge,
CB22 3HG
England.

Tel. (01223) 832851

Fax (01223) 837215

info@dig.co.uk

www.intumescentseals.co.uk



Part of the Dixon
International Group Ltd
www.dig.co.uk

* Colours may vary slightly between examples illustrated in print, online and actual examples - which will depend upon lighting conditions in situ.